

Projection Halogen Lamps

IWASAKI Lamp Type	Reference or Substitute Lamp	Volts (V)	Watts (W)	Initial Lumens (lm)	Color Tempera- ture (°K)	Average Life (hrs.)	Dimensions (mm)			Base	Filament	Fig. No.
							M.D. d	M.O.L. l	L.C.L.			
JCD150W-S/G1		100, 120	150	4050	3250	50	13.5	50	30	G6.35-1.0	CC-6	1
JCD200W-S/G1		220/230	200	4700	3100	50	17.0	63	40	G6.35-1.0	CC-13	3
		240/250	200	4700	3100	50	17.0	63	40	G6.35-1.0	CC-13	3
JCD250W-S/G1		100, 120	250	7000	3300	50	17.0	50	33	G6.35-1.0	CC-6	2
JCD250W-S/G1		220/230	250	6250	3200	50	17.0	63	40	G6.35-1.0	CC-13	3
		240/250	250	6250	3200	50	17.0	63	40	G6.35-1.0	CC-13	3
JCD300W-S/G1		100, 120	300	8400	3250	50	17.0	50	33	G6.35-1.0	CC-6	2
JCD300W-S/G1		220/230	300	7500	3200	50	21.0	63	40	G6.35-1.0	CC-13	3
		240/250	300	7500	3200	50	21.0	63	40	G6.35-1.0	CC-13	3
FDX12V100W	FDX	12	100	2800	3350	70	11.0	44	30	G6.35-1.25	C-Bar-6	4
FDW24V150W	FDW	24	150	4700	3400	70	13.5	50	30	G6.35-1.0	C-Bar-6	4
FDT12V100W	FDT	12	100	2800	3350	70	11.0	52	27	GY9.5	C-Bar-6	5
FDS24V150W	FDS A1/262	24	150	4700	3400	70	13.5	60	33	GY9.5	C-Bar-6	6
DZE24V150W	DZE	24	150	4300	3250	100	13.5	60	33	GY9.5	C-Bar-6	6

Burning position: Any




Fig. 1

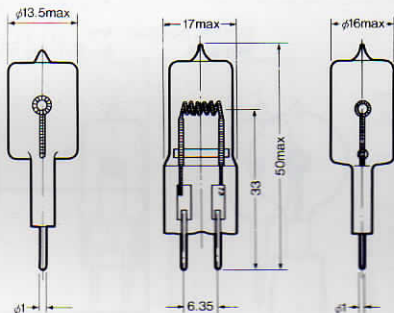


Fig. 2


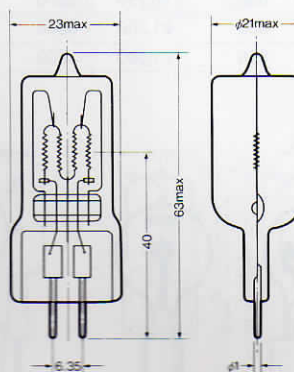


Fig. 3



G6.35-1.0 (G1)
(G6.35-1.25) (G2)




Fig. 4

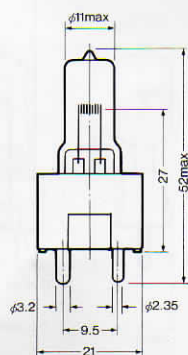


Fig. 5


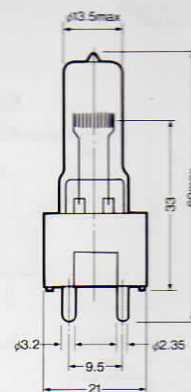


Fig. 6

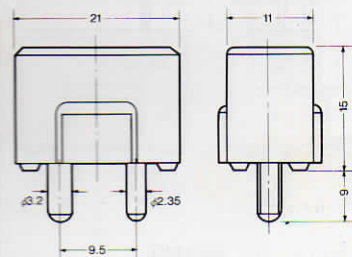

GY9.5 (B)