

PHYSICAL DATA AND CHARACTERISTICS

IWASAKI Lamp Type	Reference or Substitute Lamp	Volts	Watts	Approx. Initial Lumens (lm)	Colour Temperature (K)	Rated Average Life (hrs.)	Dimensions (mm)			Base	Filament	Fig. No.
							M.D.	M.O.L.	L.C.L.			
JCD150WL/G1		100,120	150	3300	3100	300	13.5	50	30	G6.35	CC-6	1
JCD200WL/G1		100,120	200	4400	3100	300	15.5	50	33	G6.35	CC-6	1
JCD200WL/G1		220/230	200	4000	3000	150	15.5	63	40	G6.35	CC-13	2
		240/250	200	4000	3000	150	15.5	63	40	G6.35	CC-13	2
JCD250WL/G1		100,120	250	5750	3100	300	15.5	50	33	G6.35	CC-6	1
JCD250WL/G1		220/230	250	5000	3100	200	15.5	63	40	G6.35	CC-13	2
		240/250	250	5000	3100	200	15.5	63	40	G6.35	CC-13	2
JCD300WL/G1	DRA	100,120	300	6900	3100	300	15.3	50	33	G6.35	CC-6	1
JCD300WL/G1	A1/249	220/230	300	6600	3100	300	21.0	63	40	G6.35	CC-13	2
		240/250	300	6600	3100	300	21.0	63	40	G6.35	CC-13	2
JCD300W/A2		220/230	300	6900	3100	200	15.0	65	37	G6.35-1.5	CC-2V	3
		240/250	300	6900	3100	200	15.5	65	37	G6.35-1.5	CC-2V	3

Burning position: Any




Fig. 1




Fig. 2



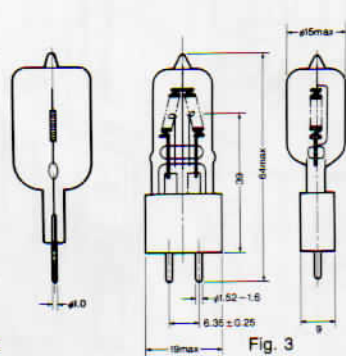


Fig. 3

BASE TYPE



G6.35



G6.35-1.5 (A2)